

# Lithium Primary Battery (Li-SOCl<sub>2</sub>)

# CLE-04

3.6V, 2/3AA Bobbin

COROS+

## Specifications

Standard	ER14335
Nominal Voltage	3.6V
Nominal Capacity (@~1mA, to 2.0V)	1.65Ah
Max. Cont. Current	70mA
Max. Pulse Current	140mA
Operating Temp. range	-55~+85°C
Lithium Contents	~0.4g
Weight	13g
UL Filing No.	MH66316

## Dimension




## Available Terminals & Connectors

T1, T2, T3, T3R, T3EU, T3EUR, AX,  
Wire, C&W (custom type)


## WARNING

Fire, explosion, and severe burn hazards.  
Do not disassemble  
Do not heat above 100°C  
Do not recharge, short circuit, crush, incinerate, or expose contents to water


Discharge Characteristics at +25°C

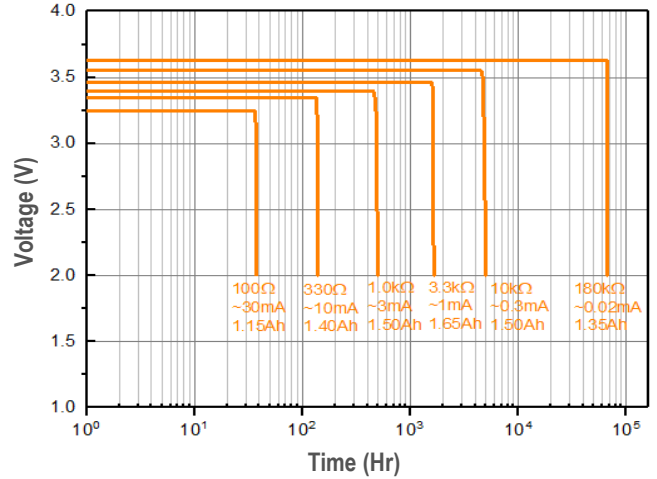

Capacity vs. Current

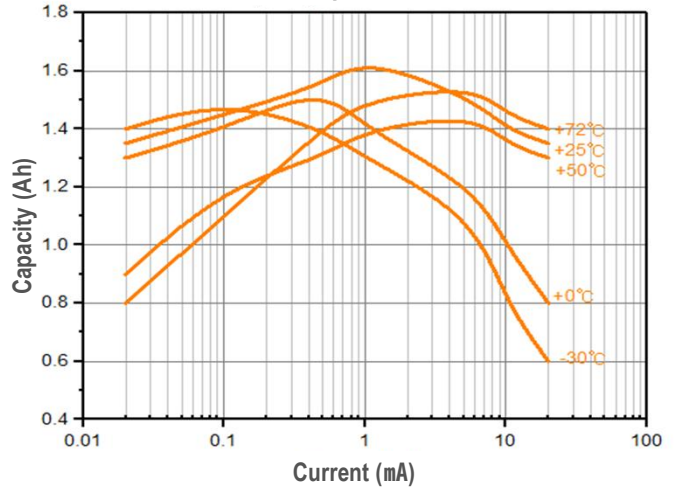

Voltage vs. Temperature

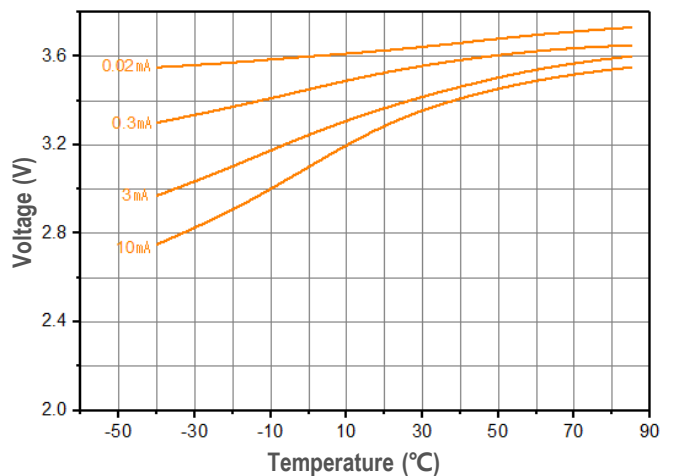

(Typical values stored at 25°C for one year)