

# Lithium Primary Battery (Li-SOCl<sub>2</sub>)

## CLE-10

3.6V, A Bobbin

COROS+

### Specifications

Standard	ER17505
Nominal Voltage	3.6V
Nominal Capacity (@~3mA, to 2.0V)	3.6Ah
Max. Cont. Current	100mA
Max. Pulse Current	200mA
Operating Temp. range	-55~+85°C
Lithium Contents	~0.9g
Weight	24g
UL Filing No.	MH66316

### Dimension




### Available Terminals & Connectors

T1, T2, T3, T3R, T3EU, T3EUR, AX,  
Wire, C&W (custom type)


### WARNING

Fire, explosion, and severe burn hazards.  
Do not disassemble  
Do not heat above 100°C  
Do not recharge, short circuit, crush, incinerate, or expose contents to water


### Discharge Characteristics at +25°C

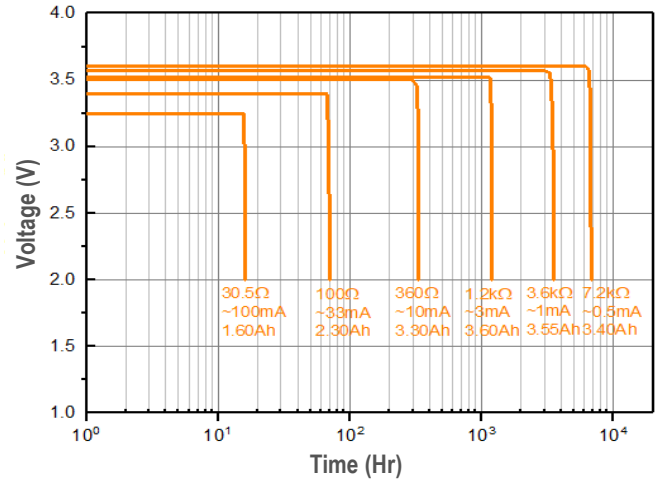

### Capacity vs. Current

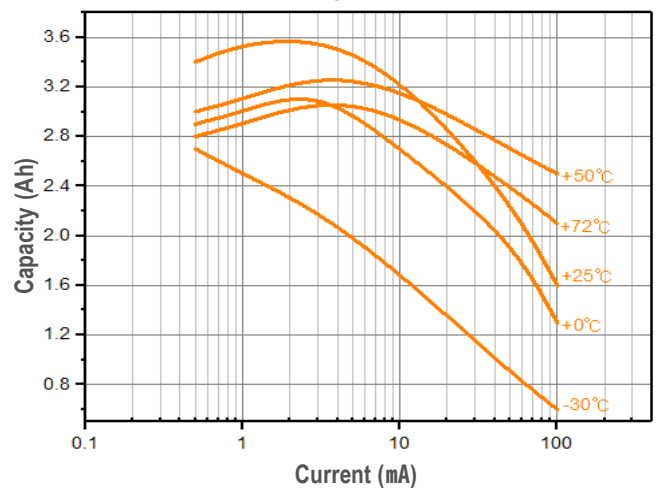

### Voltage vs. Temperature

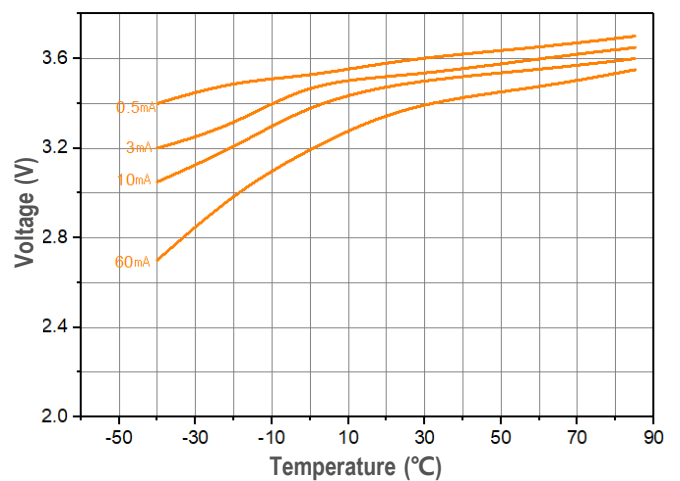

(Typical values stored at 25°C for one year)