

# Lithium Primary Battery (Li-SO<sub>2</sub>Cl<sub>2</sub>)

# CLE-209


3.9V, D Bobbin

COROS+

## Specifications

Standard	ER33600
Nominal Voltage	3.9V
Nominal Capacity (@~5mA, to 2.0V)	16.0Ah
Max. Cont. Current	300mA
Max. Pulse Current	400mA
Operating Temp. range	-40~+85°C
Lithium Contents	~4.8g
Weight	98g
UL Filing No.	MH66316

## Dimension

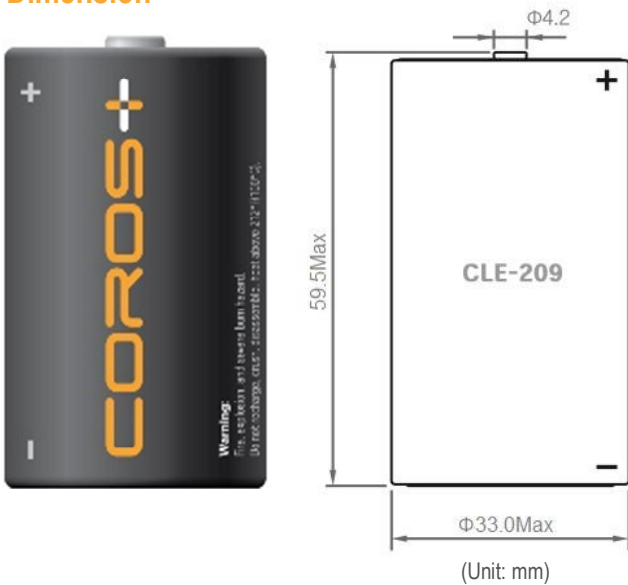


## Available Terminals & Connectors

T1, AX, Wire, C&W (custom type)


## WARNING

Fire, explosion, and severe burn hazards.  
Do not disassemble  
Do not heat above 100°C  
Do not recharge, short circuit, crush, incinerate, or expose contents to water


Discharge Characteristics at +25°C

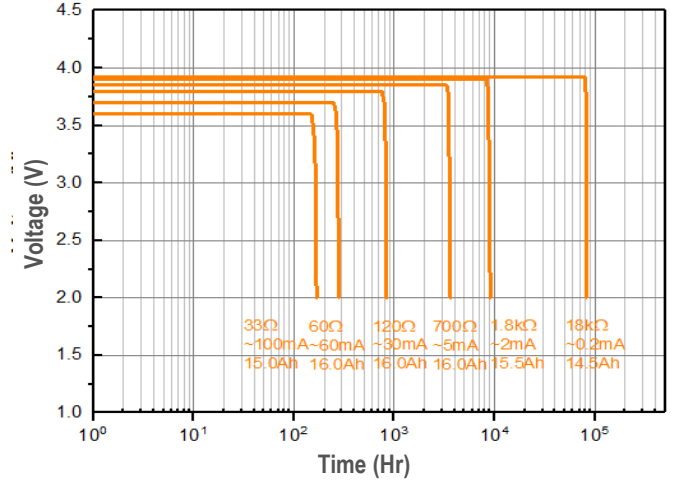

Capacity vs. Current

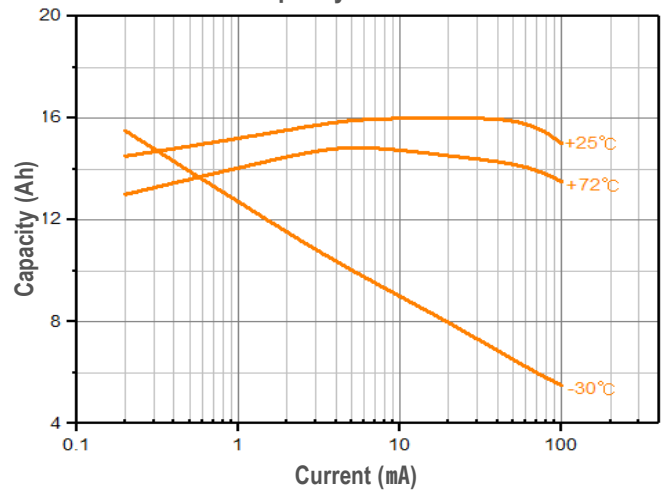

Voltage vs. Temperature

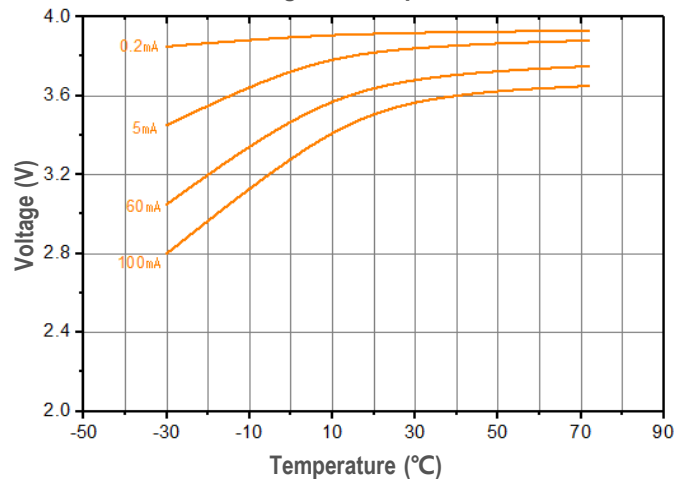

(Typical values stored at 25°C for one year)