

Lithium Primary Battery (Li-SOCl₂)

CLH-14


3.6V, C Spiral

COROS+

Specifications

| | |
|------------------------------------|-----------|
| Standard | ER26500 |
| Nominal Voltage | 3.6V |
| Nominal Capacity (@~15mA, to 2.0V) | 6.0Ah |
| Max. Cont. Current | 1000mA |
| Max. Pulse Current | 2000mA |
| Operating Temp. range | -55~+85°C |
| Lithium Contents | ~2.0g |
| Weight | 52g |
| UL Filing No. | MH66316 |

Dimension

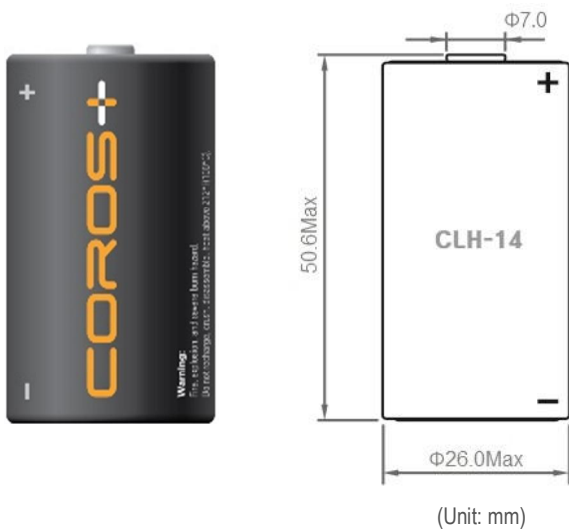


Available Terminals & Connectors

T1, AX, Wire, C&W (custom type)


WARNING

Fire, explosion, and severe burn hazards.
 Do not disassemble
 Do not heat above 100°C
 Do not recharge, short circuit, crush, incinerate, or expose contents to water


Discharge Characteristics at +25°C

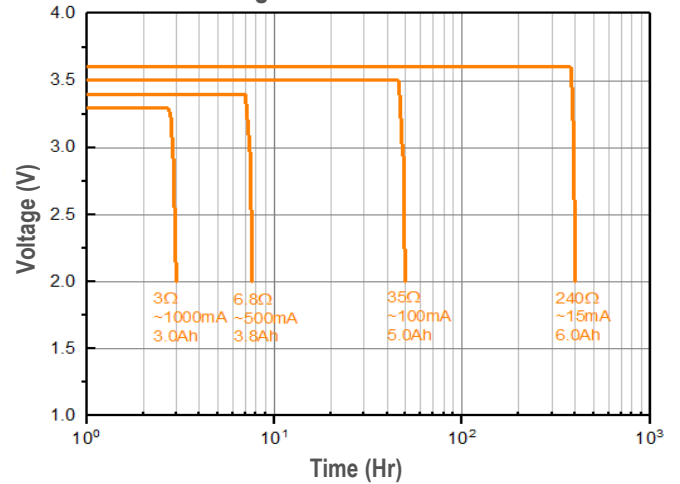

Capacity vs. Current

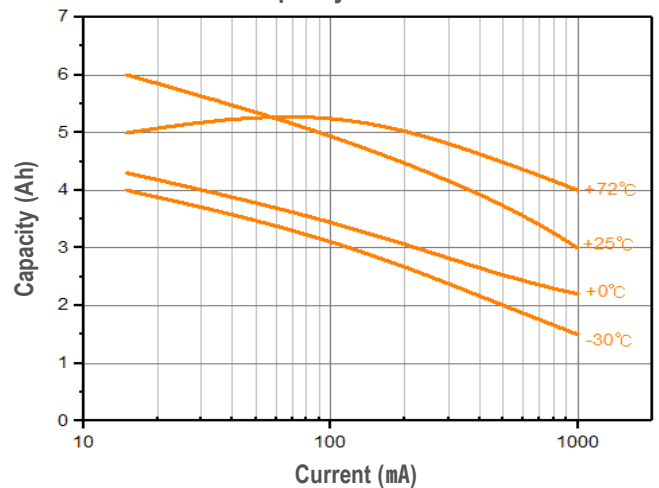

Voltage vs. Temperature

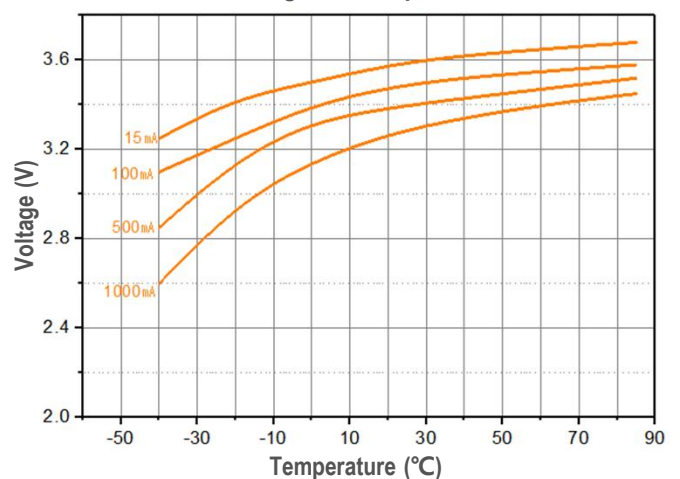

(Typical values stored at 25°C for one year)