

Lithium Primary Battery (Li-MnO₂)

CR17505


3.0V, A Spiral

COROS+

Specifications

Standard	CR17505
Nominal Voltage	3.0V
Nominal Capacity (@~1mA, to 2.0V)	2800mAh
Max. Cont. Current	1000mA
Max. Pulse Current	3000mA
Operating Temp. range	-40~+70°C
Lithium Contents	~1g
Weight	25g
UL Filing No.	MH66316

Dimension

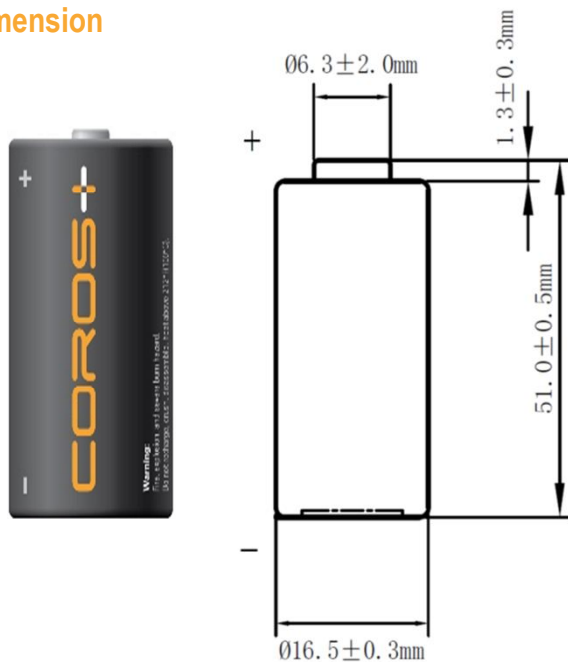


(Unit: mm)


WARNING

Fire and burn hazard. Do not recharge, short circuit, over discharge, crush, disassemble, 100°C or incinerate. Keep battery far away from children, put them in original package until ready to use. Dispose of used batteries promptly.


Discharge Characteristics

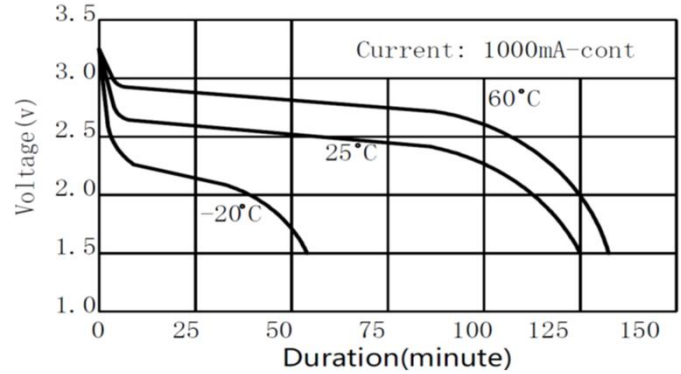

Discharge Characteristics

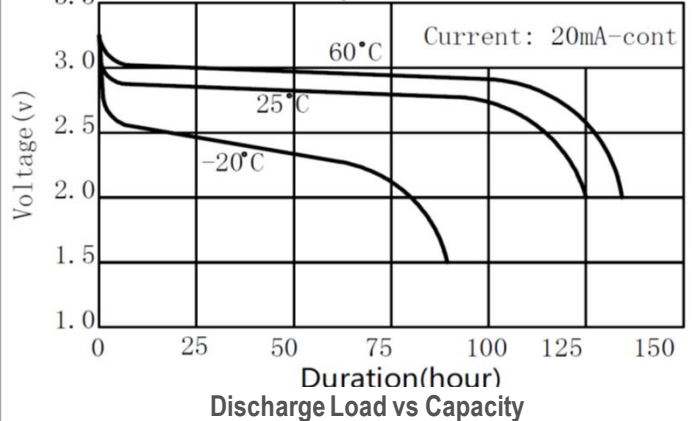

Discharge Load vs Capacity

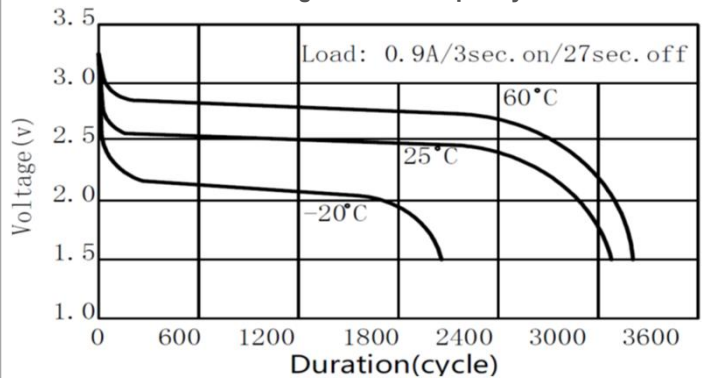

Discharge Characteristics after Storage

