

Hybrid Pulse Capacitor

HPC1530


3.6V or 3.9V, Capacitor

COROS+

Specifications

Standard	HPC-1530
Nominal Voltage	3.6V or 3.9V
Nominal Discharge Capacity	
- Charged to 3.67V	300As (83mAh,300mWh)
- Charged to 3.90V	510As (142mAh,553mWh)
- Charged to 4.10V	640As (178mAh,729mWh)
Discharge End Voltage	2.5V
Nominal Discharge Current	125mA
Max. Cont. Dis. Current	750mA
Max. Pulse Current	3000mA
Charge (constant current)	
Maximum Charge Current	50mA
Maximum Charge Voltage	4.10V
Operating Temp. Range	-40~+85°C
Cell Impedance (at RT,1kHz)	Max. 120Ω
Weight	10.0g
UL Filing No.	Yes

Dimension



(Unit: mm)

General Behavior

1. Shelf life at different storage temperatures to 80% initial capacity

Temperature	HPC Alone	HPC in Hybrid Battery
RT	3 years	10 years
+60°C	4 weeks	7 years
+80°C	1 week	At least 1 year

2. No. of charge and discharge cycles to 80% of initial capacity

	100% DOD	10% DOD	1% DOD
Charge to 3.67V	4,000	40,000	400,000
Charge to 3.90V	1,000	10,000	100,000

3. Temperature Range

	HPC Alone	HPC in Hybrid Battery
Operating Temperature	-30~+60°C	-40~+85°C
Storage Temperature	-30~+60°C	-30~+60°C

4. Safety

Short Circuit @RT, +55°C, +85°C	Pass
High Temperature exposure	Pass
Overcharge	Pass
Compression	Pass
Shock and Vibration	Pass
Impact	Pass
Forced discharge	Pass


Hybrid Pulse Capacitor HPC1530

3.6V or 3.9V, Capacitor


COROS+

Performance Data


Voltage & Time curves for HPC-1530
at Li/SOCI2 potential 3.67V, 350mA

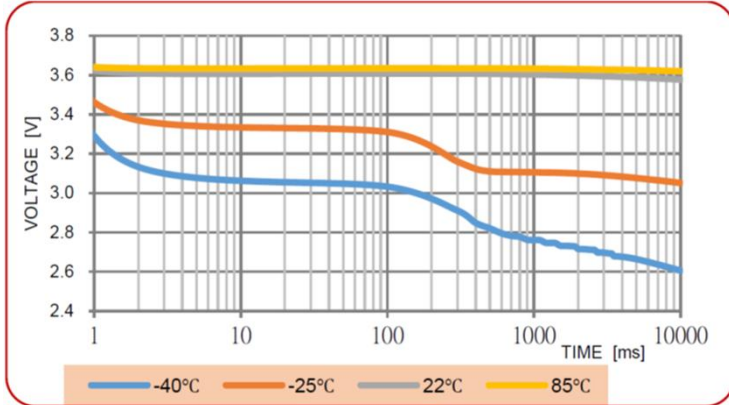


Voltage & Time curves for HPC-1530
at Li/SOCI2 potential 3.67V, 600mA

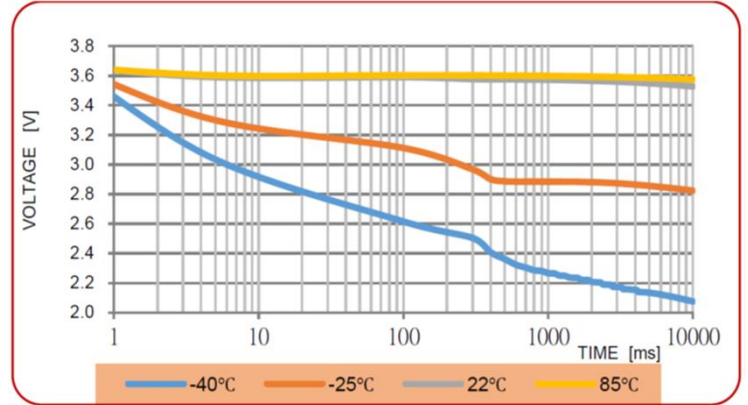

Cycle Life for HPC-1530 @100% DoD
(charge @50mA, discharge @125mA)

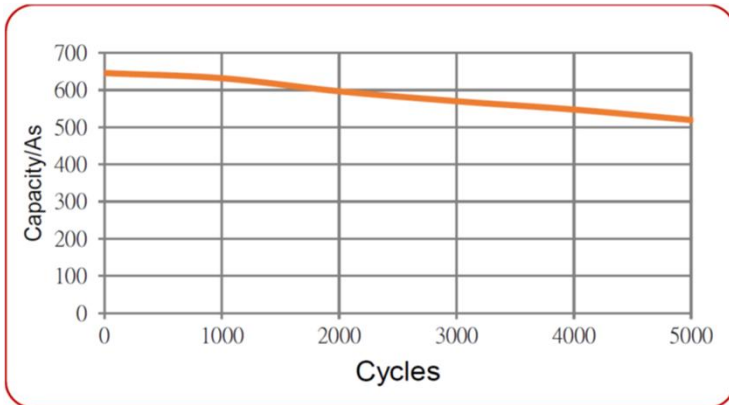

Voltage curves for HPC-1530 at various
discharge rates at +22°C @4.1V

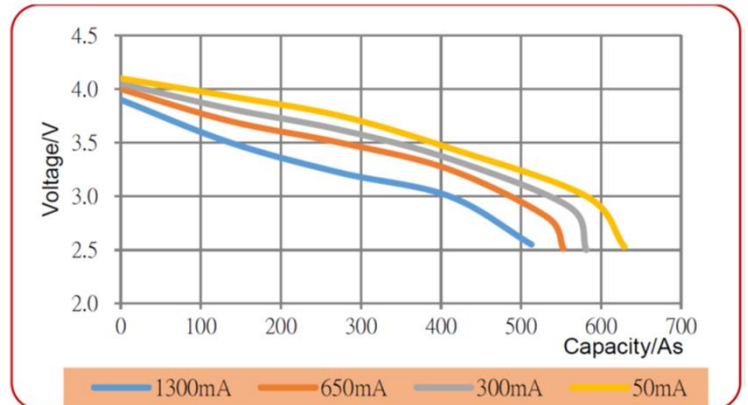

WARNING

- Fire, explosion and severe burn hazard.
- Do not disassemble
- Do not heat above 100°C
- Do not short circuit
- Do not incinerate
- Do not expose contents to water
- Do not charge above 4.1V