

Lithium Primary Battery (Li-SOCl₂)

CLE-08


3.6V, 2/3A Bobbin

COROS+

Specifications

Standard	ER17335
Nominal Voltage	3.6V
Nominal Capacity (@~1mA, to 2.0V)	2.2Ah
Max. Cont. Current	100mA
Max. Pulse Current	200mA
Operating Temp. range	-55~+85°C
Lithium Contents	~0.6g
Weight	19g
UL Approval	MH48851

Dimensions

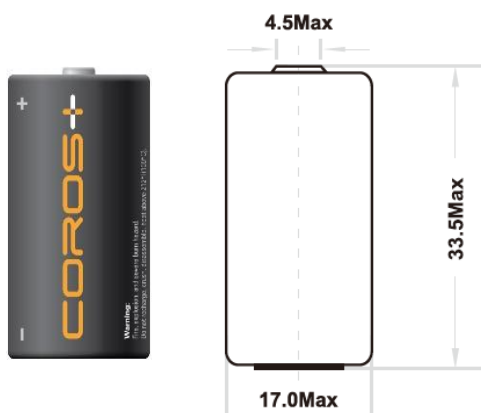

(Unit: mm)


Available Terminals & Connectors

T1, T2, T3, T3R, T3EU, T3EUR, AX,
Wire, C&W (custom type)


Warning

Fire, explosion, and severe burn hazards.
Do not disassemble
Do not heat above 100°C
Do not recharge, short circuit, crush, incinerate, or expose contents to water


Discharge Characteristics at +25°C

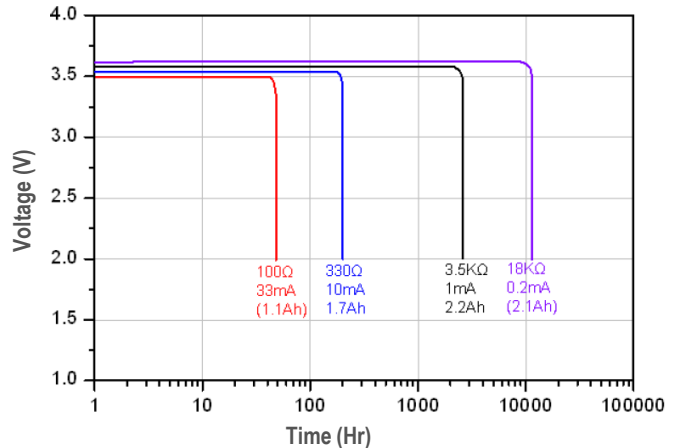

Capacity vs. Current

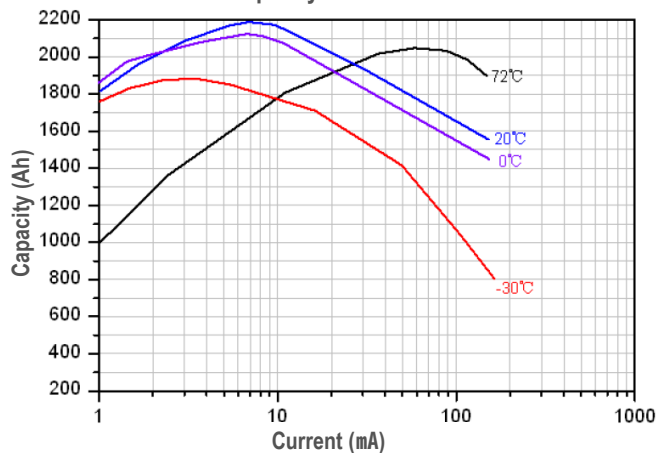

Voltage vs. Temperature

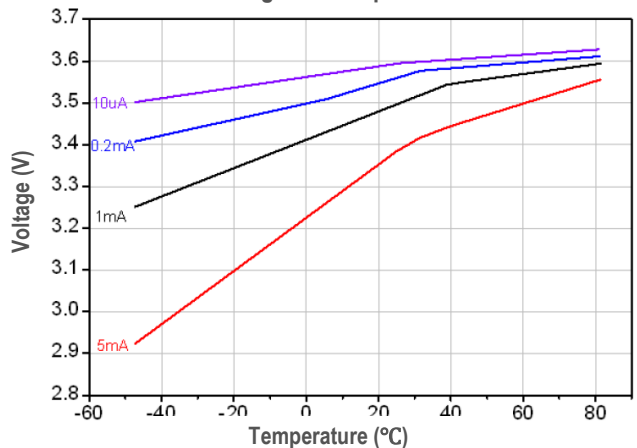

(Typical values stored at 25°C for one year)

COROS BATTERY CO., LTD. www.corosbattery.com info@corosbattery.com

V-23A

Any values in this data sheet are only for information purpose and not the warranty of future performance and they are subjected to change without notice.